**DATASHEET**
rev. 03 - 03/06/2026

Tecnosystemi group

Patent MADE IN ITALY

# EF 7 - 11 - 15 - 20 lt

## EF 7 - 11 - 15 - 20 L mini pump

- cod. 12170036 - cod. 12170093 - cod. 12170037
- cod. 12170094 - cod. 12170038 - cod. 12170046
- cod. 12170078 - cod. 12170079




EasyFlow

## TECHNICAL SPECIFICATIONS:

- Max flow rate hourly from 7 to 20 lt/h
- Power supply 230V - 50Hz
- Alarm contact C-NO/NC 8A
- Power consumption 19 W
- Max noise level 25 [dB(A)]
- For air conditioners from 5 to 16 kW
- Max. delivery 7 m per EF 7; 8 m for EF11; 10 m for EF15
- Intake max 2 m vertical between floating body and pump
- Cover with sealing gasket and vent hole
- Tube size Ø 4 x 6 mm
- Pump dimensions L 90 x H 55 x P 30 mm
- Float tank dimensions: L 90 - H 40 - D 35 mm

## PACK COMPLETE WITH


- 1 pump body
- 1 float tank
- 2 double-sided adhesives for anchor plates
- 2 plates for pump / floating body anchoring
- 1 connection hose 1 m - Ø 4x6 mm
- 1 vent tube Ø 4x6 mm

**Tecnosystemi S.p.A. - Società Benefit** | www.tecnosystemi.com
Plant 1: Via dell'Industria, 2/4 - Plant 2: via Caduti del Lavoro, 7 - Plant 3: via Caduti del Lavoro, 5
Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (Treviso) - Italy
Phone +39 0438 500 044 | Fax +39 0438 501 516 | **n. verde 800 904474 (only for Italy)**

Smart Clima
Accessories for Air Conditioning

- 1 connecting sleeve in rubber
- 1 removable wiring harness connector
- 1 sheet of instructions


## EF 7 lt

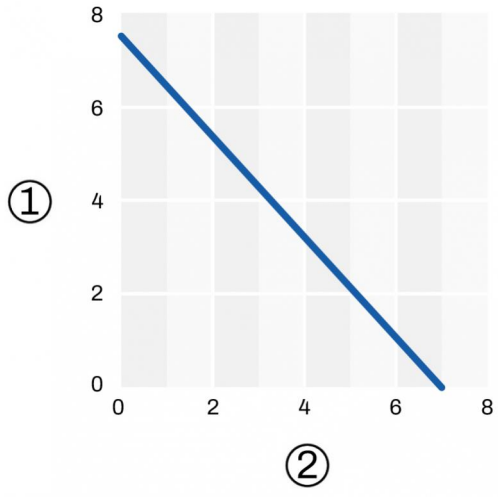


[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)

- For air conditioners up to 5 kW
- Max. 7 m vertical delivery
- Power consumption: 15 W
- Max noise level 21 [dB(A)]


## EF 11 lt

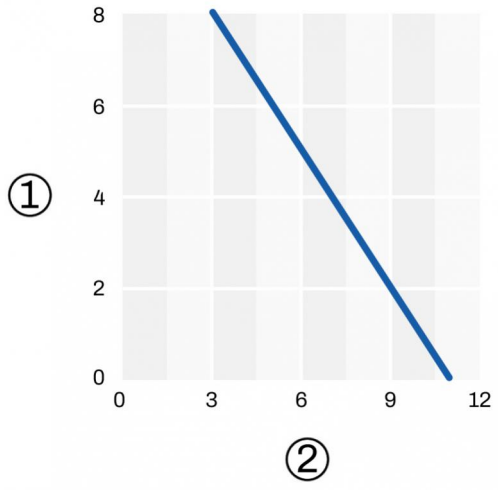


[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)


- For air conditioners up to 10 kW
- Max. 8 m vertical delivery
- Power consumption 19 W
- Max noise level 21 [dB(A)]

## EF 15 lt

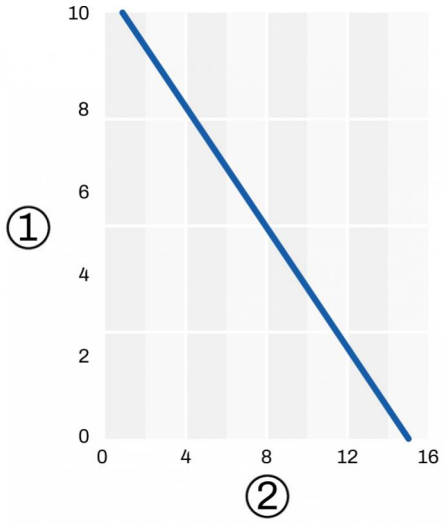


[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)
• For air conditioners up to 16 kW
• Max. 10 m vertical delivery
• Power consumption 19 W
• Max. noise level 25 [dB (A)]

## EF 20 lt

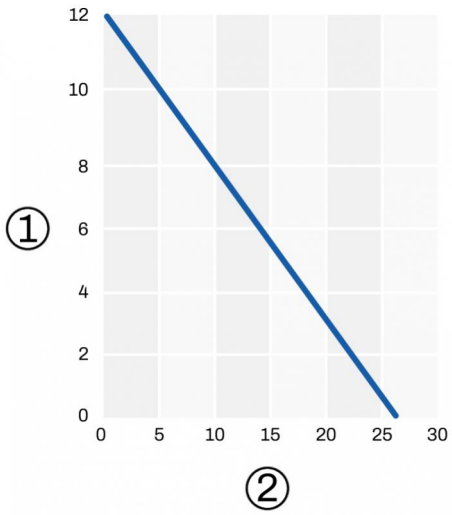


[1] Air delivery (vertical m)
[2] Flow rate (litres/hour)

• For air conditioners up to 20 kW
• Max. 12 m vertical delivery
• Power consumption 19 W
• Max. noise level 26 [dB (A)]

## WALL-MOUNTED APPLICATIONS

• wall splits
• consoles
• fan coils

## CEILING-MOUNTED APPLICATIONS

• ceiling-mounted air conditioners
• ducted

## ITEMS

| CODE | DESCRIPTION |
|---|---|
| 12170036 | EASY FLOW 7 LT. MINI PUMP EF7 |
| 12170093 | EASY FLOW 7 LT. MINI PUMP WITH VERTICAL CONNECTION EFV-7 |
| 12170037 | EASY FLOW 11 LT. MINI PUMP EF11 |
| 12170094 | EASY FLOW 11 LT. MINI PUMP WITH EFV-11 VERTICAL CONNECTION |
| 12170038 | EASY FLOW 15 LT. MINI PUMP “EF15” |
| 12170046 | EASY FLOW 15 LT. MINI PUMP WITH VERTICAL CONNECTION EFV-15 |
| 12170078 | EASY FLOW 20 LT. MINI PUMP EF20 |
| 12170079 | EASY FLOW 20 LT. MINI PUMP WITH VERTICAL CONNECTION EFV20 |

All rights relating to this publication are the exclusive property of Tecnosystemi SpA.
Tecnosystemi SpA reserves the right to make changes at any time and without notice, for technical or commercial needs.